

Silenziatore

modello
SCT

Livelli di rumore in dB 6 BAR
Noise level at 6 BAR


1/8	1/4	3/8	1/2	3/4	1
70	67	77	80	84	85

Livelli di rumore in dB 4 BAR
Noise level at 4 BAR

1/8	1/4	3/8	1/2	3/4	1
68	65	74	76	80	82







Bronzo sinterizzato
Sintered bronze
Bronze frittè
Sinterbronze

Ottone
Brass
Laiton
Messing



modello **SCT**

A	E	F	L	H
1/8" BSP	12	6	15	21
1/4" BSP	15	7	19	26
3/8" BSP	19	8	28	36
1/2" BSP	23	10	33	43
3/4" BSP	30	13	40	53
1" BSP	38	15	48	63

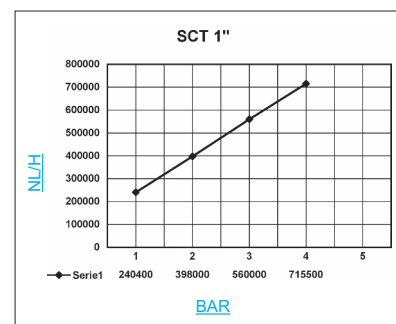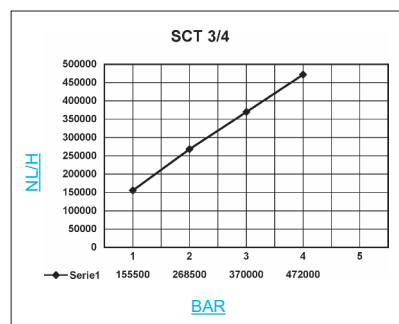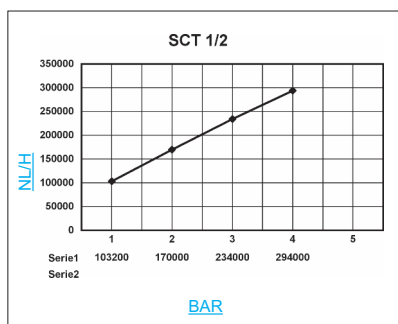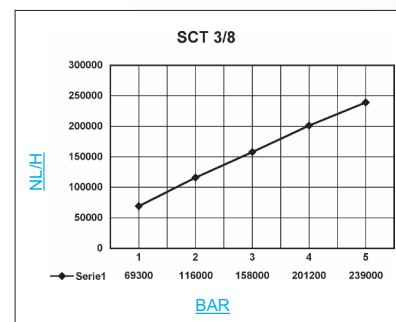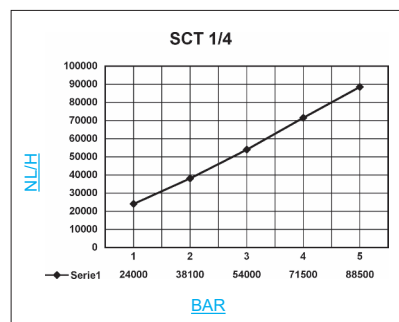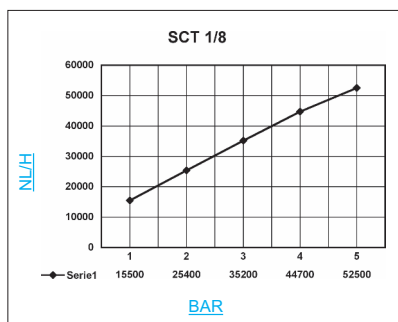

SILENZIATORI
AIR SILENCERS
SILENCIEUX
SCHALLDÄMPFER

COPOR

Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: + 80 °C - minima: -10°C - Filettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.