

Silenziatore

modello
SFE

Livelli di rumore in dB 6 BAR
Noise level at 6 BAR


1/8	1/4	3/8	1/2	3/4	1
74	72	88	90	90	92

Livelli di rumore in dB 4 BAR
Noise level at 4 BAR







1/8	1/4	3/8	1/2	3/4	1
70	69	85	85	86	88

Filo in acciaio inox
Stainless steel wire
Fil acier inox
Inox stahldraht

Ottone
Brass
Laiton
Messing



A	F	H	CH
1/8" BSP	6	15	13
1/4" BSP	7	18	16
3/8" BSP	8	20	19
1/2" BSP	10	22	24
3/4" BSP	10	26	30
1 BSP	12	28	36
M 5	4	8	8
1/8" FEM BSP 5		13	13

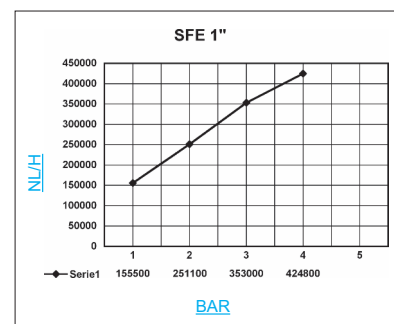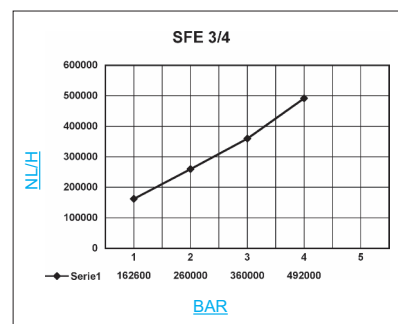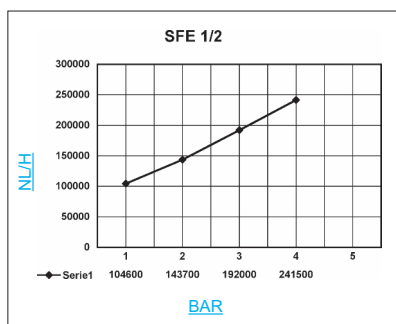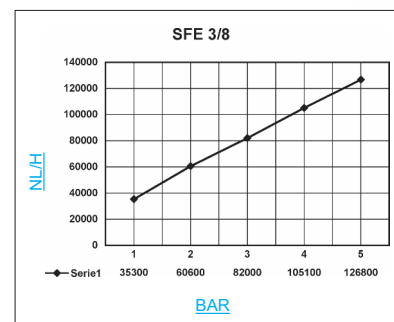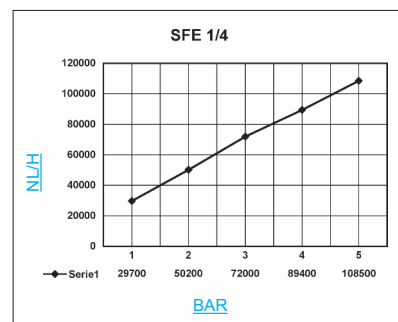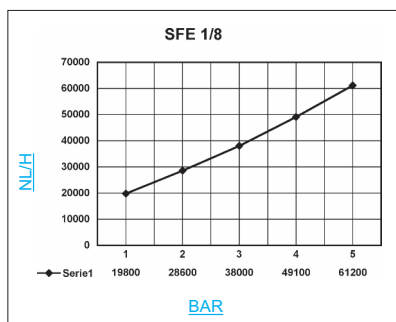


SILENZIATORI
AIR SILENCERS
SILENCIEUX
SCHALLDÄMPFER

COPOR

Condizioni normali di utilizzo dei silenziatori metallici sinterizzati: Pressione massima 12 BAR - Temperatura massima: + 80 °C - minima: -10°C - Filettature speciali sono disponibili a richiesta per quantità. - Le caratteristiche e le dimensioni riportate nel presente catalogo non si intendono impegnative.
Maximum pressure of use: 12 BAR - Maximum temperature: +80 °C - Lowest temperature: -10 °C - Characteristics and dimensions reported on this catalogue aren't engaging.

A	F	H	CH
1/8" NPT	8	15.5	13
1/4" NPT	11	21.5	16
3/8" NPT	11	22	19
1/2" NPT	14	26	24
3/4" NPT	14	29	30
1" NPT	16	33	36

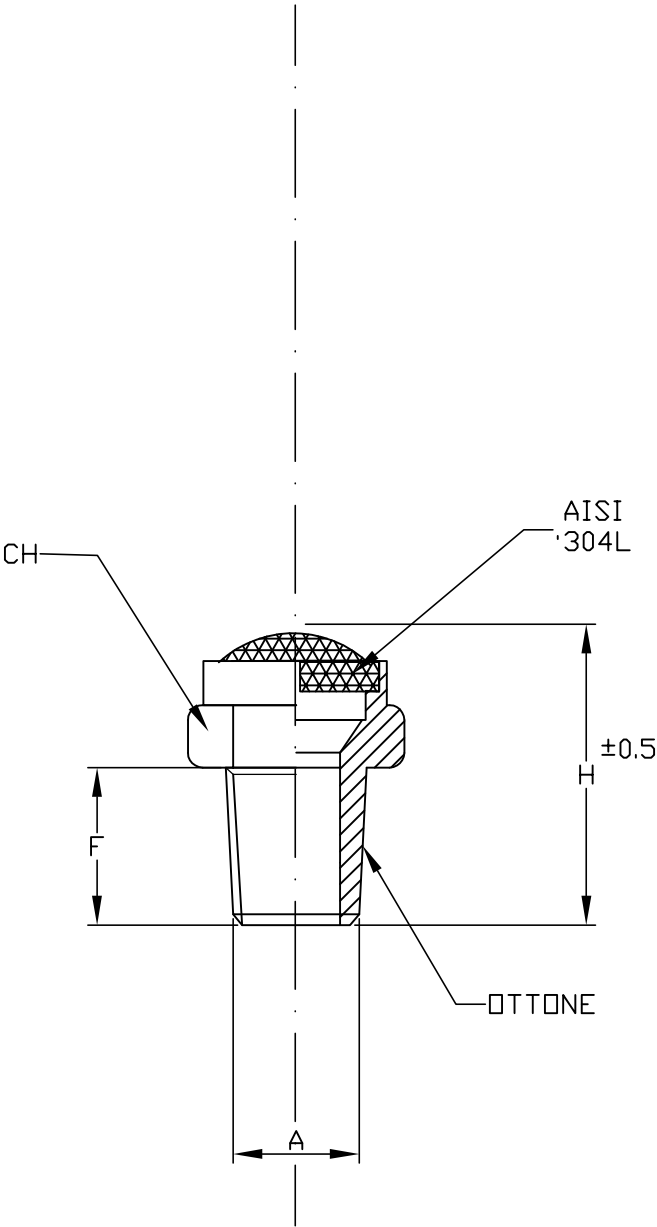

COPOR		S.P. PER BULGORELLO 22070 VERTEMATE CON MINOPRIO COMO ITALY		SCALA		PESO GR.
				MATERIAL :		
		DATA		NOME		NOTE
		23/01/01		PAOLO		
						SERIE SFE NPT
POS	MODIFICATO	DATA	NOME	ORIGINE		